

Unpowered Asset Gateway

AG51 (AG51-EU) Datasheet



OVERVIEW

The AG51 Unpowered Asset Tracker is a wallet-sized tracker ideal for monitoring assets like intermodal containers, construction equipment, dumpsters, light towers and other mobile assets. It features customizable GPS check-ins, user-replaceable AA batteries that last 3 to 5 years and a waterproof and ruggedized enclosure. The AG51 enables increased asset utilization, theft recovery and optimized pool inventory management. It is part of Samsara's Connected Operations Cloud, enabling you to capture data that helps run your operations more efficiently, safely, and sustainably.

CONNECTIVITY

Cellular

Security

Operating area: United
States, Canada, UK, Mexico,
Europe

Built-in flash memory to store
data when Internet connectivity
is unavailable

LTE Cat M1 and NB-IOT

All Internet connectivity secured

via HTTPS with TLS encryption

Technical Specifications

LOCATION

GPS Advanced positioning system simultaneously reads from multiple independent

satellite systems including GPS. Internal antenna for discreet installation

Default Check-in 2 check-ins per day

POWER

Battery 3 user replaceable off-the-shelf Energizer L91 AA batteries

Available for purchase at Amazon, Walmart and www.samsara.com/webstore [select

"AG51 battery replacement pack" under Accessories]

Typical battery life 3 to 5 years with 2 check-ins per day. Actual battery life may

be reduced by extreme temperature, low cellular signal strength, or increased check-ins Enabling Find My Asset reduces battery life, approximately 40%, if activated at installation

and left on throughout the product life

For questions about the safe use of AA battery powered devices, please consult

your company's safety department

ENCLOSURE

Material UV-stabilized polycarbonate

Dimensions 110 × 81 × 31 mm

Weight 168 q

Operating Temperature -40°C to 60°C

IP Rating IP67 (weatherproof and water resistant up to 1m submerged)

IP69K (highest grade resistance to high pressure and high temperature washdown)

Hazardous locations Certified Class I Division 2 Group A-D T6 (C1D2) for hazardous locations

Technical Specifications (cont'd)

SAMSARA CLOUD SOFTWARE FEATURES

Features Map-based location tracking

Approximate cell and WiFi based location

Wake on Motion

Find My Asset for US only (see Battery section on more details on impact to battery life)

Developer APIs


Alerts

Geofence

INSTALL ACCESSORIES

What's Included

2x Phillips screws and 3x Energizer L91 AA batteries

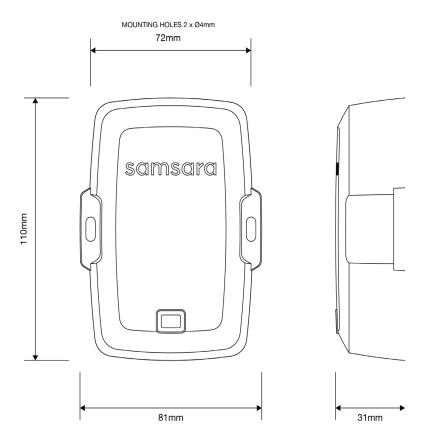

Regulations

IC REGULATIONS

This device complies with Industry Canada's licence-exempt RSSs. Operation is subject to the following two conditions:

- (1) This device may not cause interference; and
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence.

L'exploitation est autorisée aux deux conditions suivantes:

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

This equipment complies with Innovation, Science and Economic Development Canada RF exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated to ensure a minimum of 20 cm spacing to any person at all times.

CAN ICES-3(B)/NMB-3(B)

IC Radiation Exposure Statement:

This equipment complies with Canada radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

IC Déclaration d'exposition aux radiations:

Cet équipement est conforme Canada limites d'exposition aux radiations dans un environnement non contrôlé. Cet équipement doit être installé et utilisé à distance minimum de 20cm entre le radiateur et votre corps.

Regulations (cont'd)

FEDERAL COMMUNICATION COMMISSION INTERFERENCE STATEMENT

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- · Reorient or relocate the receiving antenna
- · Increase the separation between the equipment and receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected
- · Consult the dealer or an experienced radio/TV technician for help

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.